



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 :

D21J 1/12, B27N 7/00

A1

(11) International Publication Number:

WO 00/44985

(43) International Publication Date:

3 August 2000 (03.08.00)

(21) International Application Number: PCT/SE00/00187

(22) International Filing Date: 31 January 2000 (31.01.00)

(30) Priority Data:

9900332-9

1 February 1999 (01.02.99)

SE

(71) Applicant (for all designated States except US): VALMET
FIBERTECH AB [SE/SE]; S-851 94 Sundsvall (SE).

(72) Inventors; and


(75) Inventors/Applicants (for US only): ERIKSSON, N., Lemnart
[SE/SE]; Klackvågen 37, S-856 53 Sundsvall (SE). SIS-
LEGÅRD, Lars-Otto [SE/SE]; Västerro 4159, S-855 90
Sundsvall (SE). SCHEDIN, Kurt [SE/SE]; Högalidsgatan
34, S-856 31 Sundsvall (SE).(74) Agents: JOHANSSON WEBJÖRN, Ingmari et al.; L.A. Groth
& Co.KB, P.O. Box 6107,, S-102 32 Stockholm (SE).(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU,
AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, CZ
(Utility model), DE, DE (Utility model), DK, DK (Utility
model), DM, EE, EE (Utility model), ES, FI, FI (Utility
model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS,
JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV,
MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO,
RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM,
TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO
patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,
GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF,
BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN,
TD, TG).

Published

With international search report.

With amended claims.

(54) Title: METHOD AND ARRANGEMENT FOR THE PRODUCTION OF LIGNOCELLULOSE-CONTAINING BOARDS

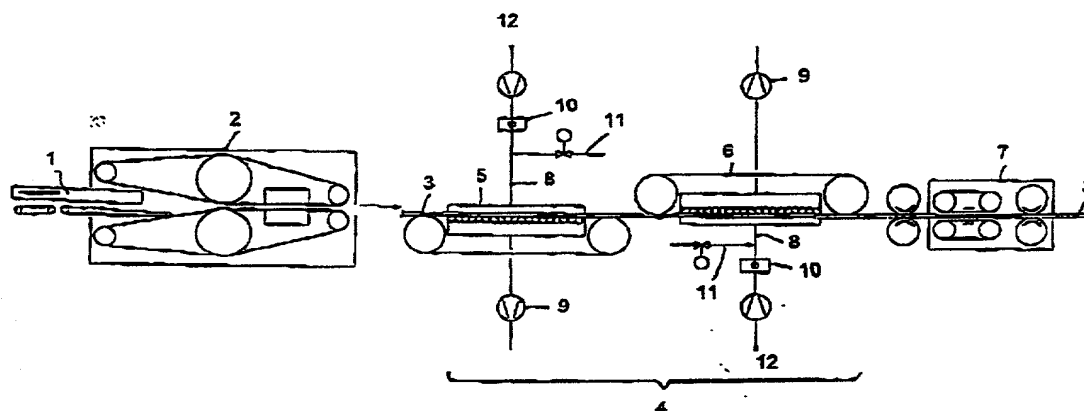

(57) Abstract

In a method and an arrangement for continuously producing lignocellulose-containing boards, the material is disintegrated into particle and/or fibre form, glue-coated, dried, and formed into a mat (1). The mat is pressed into board form (3) in a continuous steam injection press (2) and the board then passed through an after-conditioning zone (4). A specific volume of air having a specific moisture content and temperature is drawn through the board (3) in the after-conditioning zone (4) by suction.